



QR-3000-GF30

Glass fiber reinforced PET

2301 St. Joseph Industrial Park Drive Evansville, IN 47720 Phone 812/429-0901 Fax 812/429-0905 www.customcompounding.com

Appearance	<u>General Description</u> Natural/Black Color Custom Colors Available
Features	Injection Molding Grade Good Dimensional Stability High Heat Resistance Good Stiffness High Strength
Filler/Additive	30% Glass Fiber

<u>Property</u>	<u>Method</u>	<u>Value</u>	<u>Unit</u>
<i>-Physical</i>			
Specific Gravity	ASTM D792	1.5	
<i>-Mechanical</i>			
Tensile Strength @ Break	ASTM D638	15,500	psi
Tensile Elongation @ Break	ASTM D638	3	%
Flexural Modulus	ASTM D790	990,000	psi
Flexural Strength @ Break	ASTM D790	25,000	psi
Notched Izod Impact, 73°F	ASTM D256	1.2	ft.lbs/in
<i>-Thermal</i>			
Deflection Temp @ 264 psi	ASTM D648	400	°F

These test results are based on reliable procedures. Due to variable conditions and methods of processing, no guarantees or warranties are expressed or implied including the implied warranty of merchantability and fitness for particular use. The above information is not to be construed as a license or a recommendation to infringe on any patents.

-Injection Molding

Drying Conditions

Min 3 hours – Max 8 hours 250 °F

Cylinder

Rear 460-490 °F

Middle 470-500 °F

Front 480-510 °F

Nozzle 470-500 °F


Mold

Maximum 190 °F

Minimum 150 °F

Processing Temp 480-510 °F

ISO9001:2000 Registered

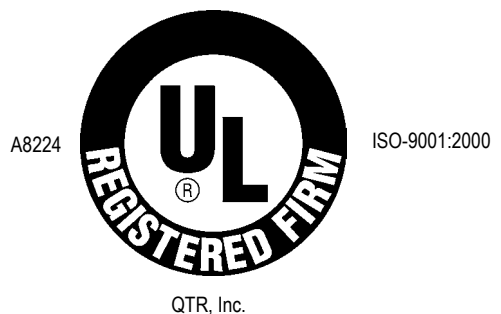

The guidelines listed above are based on specimens at various thicknesses typical in manufacturing. These values are not intended to be used for specification purposes. These are recommended starting parameters. The equipment part design and tooling will influence final process parameters. The percent recycle is dependent on part design, wall thickness, process, and final performance requests.